
FLEX FIT INSULATED BULKHEAD

Two-Piece Adjustable Bulkhead



Make any of these brands into a Flex Fit:



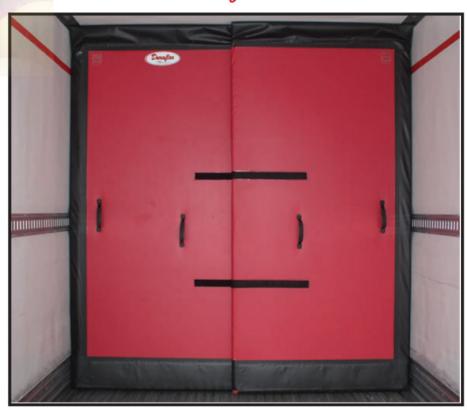



Ideal for: Multi-Temp Applications with Height & Width Variations

Features:

- · 6" flexible top provides a 4" adjustment in the height
- 2" Velcro straps provide 12" adjustment in the width to a maximum of 99"
- · Heavy duty reinforced web handles
- · 2 piece design allows replacement of one side; instead of the entire bulkhead
- · 2 piece light weight design makes it easier to move
- UHMW 60 Mil Scuff Plate with a 5 year replacement warranty
- Available in the Duraflex 2"core, Skinny Bun 3"core and the Skinny Bun Lite XP 3" core configuration





Available Options



Fan Kit

As an alternative to a rear evaporator, the Two-Temp Fan Kit allows temperature control in the second compartment. Specifications include: 10" diameter; 10 prong blade; 12 volt, 6000 hour brush life motor; displacement of 650 CFM; temperature range from -40° F to +80° F, and an On/Off switch.



Vent Kit

10" Diameter Vent with Adjustable Velcro Flap provides controlled air flow to rear compartment or return air flow when installed with a Fan Kit.



Quick Release E Strap

Installed with flush mounted hardware and comes with a UHMW abrasion guard to protect against premature wear from the track.



Cold Draw Ventilation System

As an alternative to a rear evaporator, the Cold Draw is mounted in the upper corner of the trailer. Air is drawn into the center of the compartment by a 12 volt motor and distributed across the ceiling to maintain a constant temperature.



Abrasion Plate

Available 2' and 4' high, 100 mil HDPE offers protection from forklift and pallet damage. Installed with flush mounted hardware.



Custom Labeling Up to 3" High

Identify your bulkhead with your company name and trailer number.



AIGENATED THANSPORTATION SE