




# Ideal for: Transporters needing a light-weight, rigid bulkhead or a Lifting Bulkhead System

- 3" thick laminated closed cell core for reduced weight and high insulating value
- Perimeter sealed to core to prevent moisture and food product penetration
- UHMW scuff plate protects bottom with 5 Year Warranty against wear
- Helps meet requirements of Food Safety Modernization Act (FMSA)

- Available in multiple configurations to fit any application
- No hardware at bottom will absorb impact without damage
- 10 Year Warranty against vinyl delamination of the core





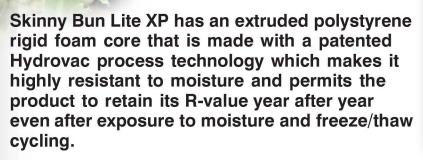



### **Available Options**



#### **Fan Kit**

As an alternative to a rear evaporator, the Two-Temp Fan Kit allows temperature control in the second compartment. Specifications include: 10" diameter; 10 prong blade; 12 volt, 6000 hour brush life motor; displacement of 788 CFM; temperature range from -40°F to +80°F, and an On/Off switch



Portable Bulkhead Rack



#### **Vent Kit**

10" Diameter Vent with Adjustable Velcro Flap provides controlled air flow to rear compartment or return air flow when installed with a Fan Kit



# Cold Draw Ventilation System

As an alternative to a rear evaporator, the Cold Draw is mounted in the upper corner of the trailer. Air is drawn into the center of the compartment by a 12 volt motor and distributed across the ceiling to maintain a constant temperature.



### **Two-Way Hinge**

Webbing reinforced on top and bottom, the Two-Way Hinge allows entry from both compartments and prevents damage.



## **Abrasion Plate**

Available 2' and 4' high, 100 mil HDPE offers protection from forklift and pallet damage. Installed with flush mounted hardware.

### Maximize use of interior trailer space with our many configurations.



#### **Tether Connect**

Configure bulkhead(s) to be securely stored away in trailer by using part #TCA with roller tracks. Never lose a bulkhead again!



# Custom Labeling Up to 3" High

Identify your bulkhead with your company name and trailer number.



**E or F Straps** 

Installed with flush mounted hardware.

1834 South Davis Rd. LaGrange, Georgia 30241 800.233.6180 • FAX 706.882.9536 www.insulatedtransportproducts.com